



Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions		Approved	Date
	Description/Approved/Date		M.H.	11/07/98
	Checked	M.H.	Date	
			M.H.	11/07/98
	Drawn	Date		
	K.R.E.		11/07/98	
	NOTES (plating thickness in micro-inches):			
	5. Per MIL-P-19468			
	9. Nickel pl. 100 min. over copper strike			
	6. Per ZZ-R-765			
1. Per QQ-B-626				
7. Per WW-T-799				
10. Per QQ-P-35				
2. Per QQ-S-764				
8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike				
3. Per QQ-C-530				
11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike				
4. Per QQ-B-750				

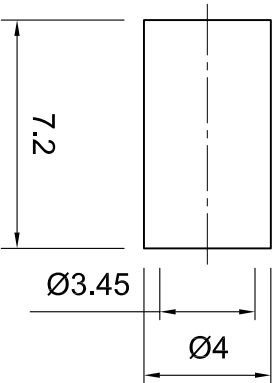

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: M	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

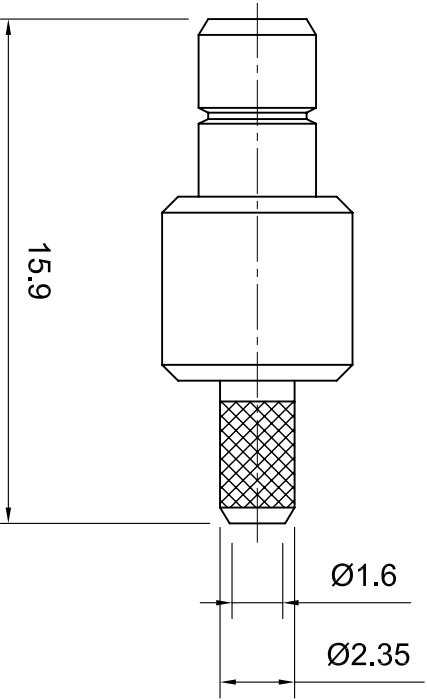

Lighthouse Technologies, Inc.
 4907 Morena Boulevard, #1411
 San Diego, California 92117

Part Number:
LTI-SBSF11GT-316

Description SMB Jack, Crimp type for RG 316, 174, 188		
Scale 1:1	Drawing No. SBSF11GT-316	File Name SBSF11GT-316