


Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1	Revisions	
	Description/Approved/Date	Approved M.H. Date 03/17/02
		Checked M.H. Date 03/17/02
		Drawn K.R.E. Date 03/14/02
	NOTES (plating thickness in micro-inches): 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike 4. Per QQ-B-750	
Dimensions are in Millimeters		



ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	Phosphor Bronze, Note 4	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

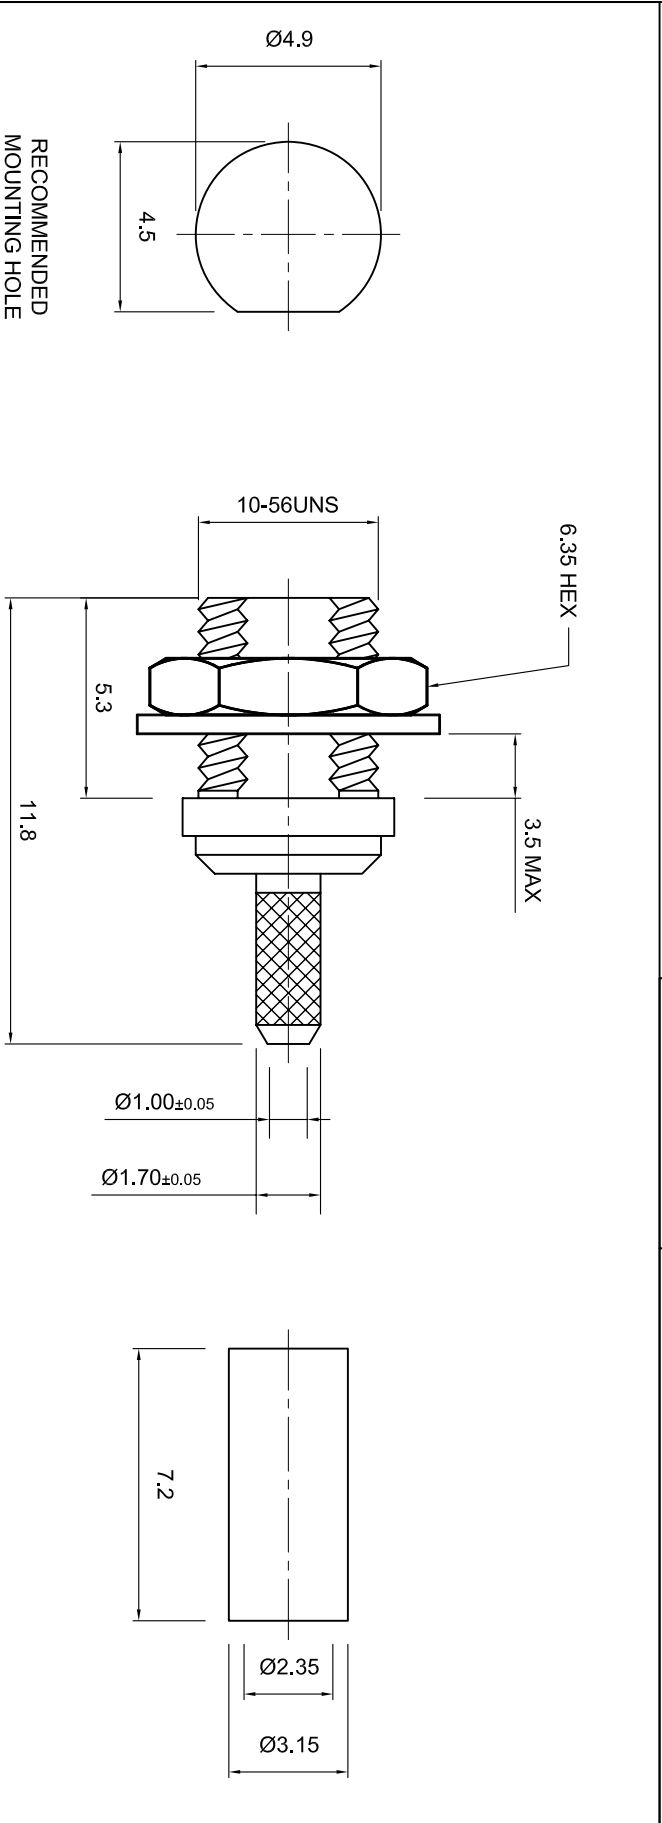

Lighthouse Technologies, Inc.
5640 Kearny Mesa Road, Suite N
San Diego, California 92111
Part Number: **LT-MCSF13RGT-178**

Description	MMCX bulkhead crimp jack for RG-178. Gold plated brass body.	
Material	Teflon dielectric	
Scale	Drawing No.	File Name
5:1	MMCX/MCSF13-178	MCSF13-178