
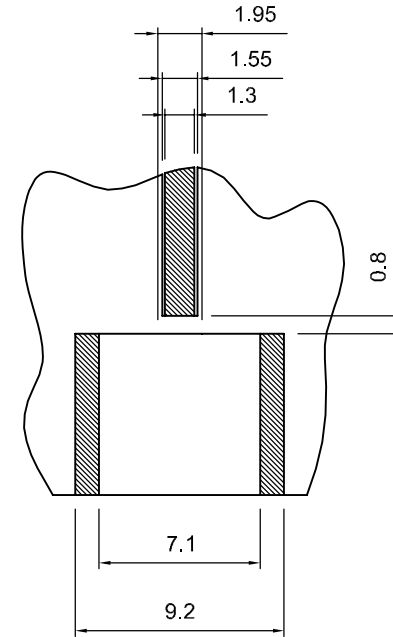
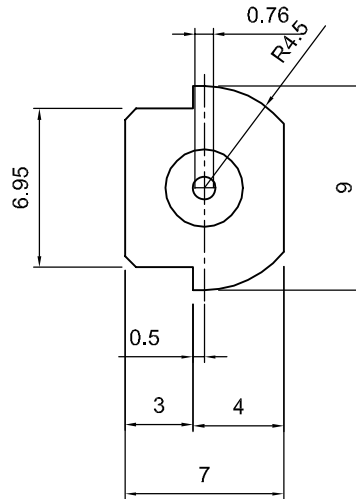


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date
			Checked M.H.	Date
			Drawn T.J.A.	Date 12/28/04
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

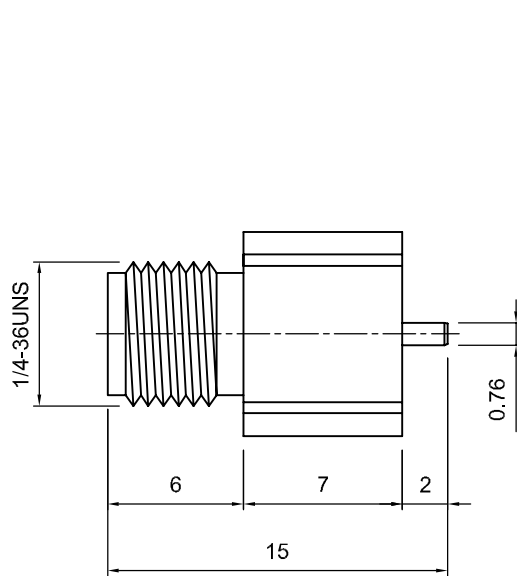

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-SASF56GT		
Connector Body	Brass, Note 1	Gold, Note 8			
Center Contact: Female	BeCu, Note 3	Gold, Note 11	Description SMA straight edge mount jack. Gold plated brass body, Teflon dielectric.		
Insulation	Teflon, Note 5	None			
Ferrule	--	--	Scale 3:1	Drawing No.	File Name SASF56
Gasket	--	--			
Hex Nut	--	--			
Lock Washer	--	--			