

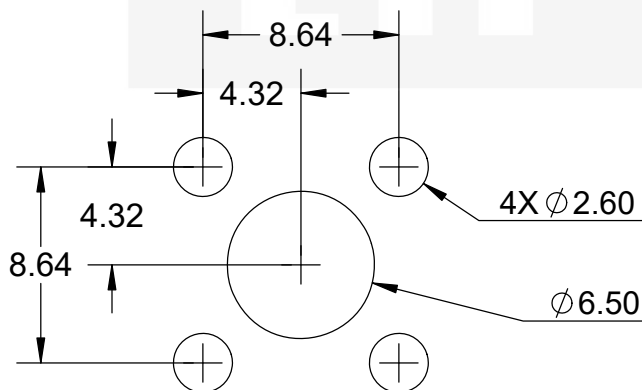
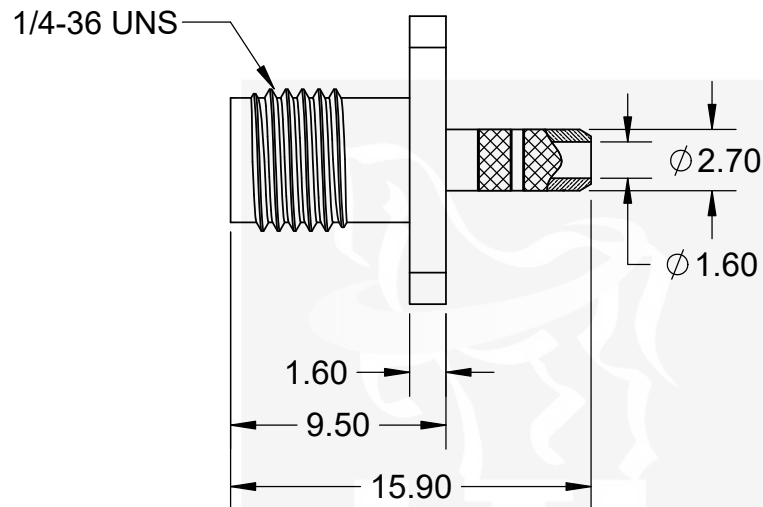



ITEM:	MATERIAL:	FINISH:	NOTES:	REVISIONS				
CONNECTOR BODY	BRASS, NOTE 1	GOLD, NOTE 8	1. PER QQ-B-626 2. PER QQ-S-764 3. PER QQ-C-530 4. PER QQ-B-750 5. PER MIL-P-19468 6. PER ZZ-R-765 7. PER WW-T-799 8. GOLD PLATED 5µin MIN. OVER NICKEL PLATE 50µin MIN. OVER COPPER STRIKE. 9. NICKEL PLATE 100µin MIN. OVER COPPER STRIKE. 10. PER ASTM-A967 11. GOLD PLATE 30µin MIN. OVER NICKEL PLATE 50µin MIN. OVER COPPER STRIKE. 12. TIN ZINC PLATE 100µin MIN. OVER COPPER STRIKE.	REV	ECR	DESCRIPTION	DRAWN	DATE
CENTER CONTACT	BERYLLIUM COPPER, NOTE 3	GOLD, NOTE 11		A		REDRAWN AND REFORMATTED FROM ACAD 2D TO SOLIDWORKS 3D.	P. BURDGE	06/09/2013
INSULATION	TEFLON, NOTE 5	----						
FERRULE	ANNEALED COPPER, NOTE 7	GOLD, NOTE 8						
GASKET	----	----						
HEX NUT	----	----						
LOCK WASHER	----	----						

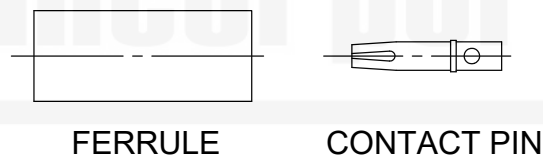

SUGGESTED MOUNTING HOLE

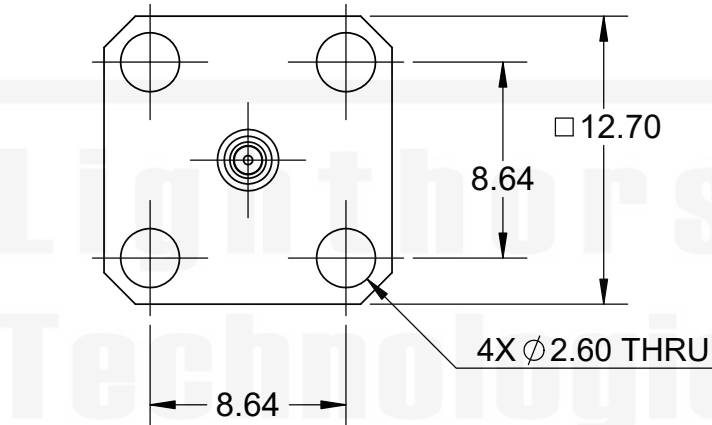

SCALE: 2/1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPYRIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.



DO NOT SCALE DRAWING		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN MILLIMETERS		
X	=	±0.5
X.X	=	±0.25
X.XX	=	±0.13
ANGLE	=	±30°



CUSTOMER APPROVAL		
SIGN / DATE:		
ENG APPR.	P. BURDGE	06/09/2013
CHECKED	M. HELD	12/16/2011
DRAWN	P. BURDGE	12/16/2011
	NAME	DATE

Lighthouse Technologies		
San Diego, CA WWW.RFCCONNECTOR.COM		
TITLE: SMA, STRAIGHT, JACK, CABLE CRIMP RG174, RG316, L100, 4 HOLE PNL MNT, SQUARE FLANGE		
SIZE	PART/DWG. NO:	REV
A	SASF12SFGT-316	A
SCALE: 3:1	FILE NAME	SHEET 1 OF 1